


800.648.4452  
www.amltd.com  
MADE IN USA  
02162016



## 1 Charge the TDX20 for 6 hours

Use the supplied USB cable and power adapter to charge from a 110VAC wall outlet.

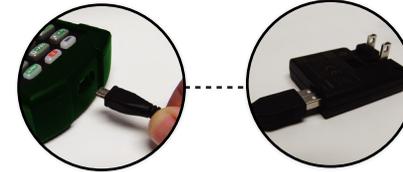

\* Phone chargers may or may not work properly with the TDX20 due to possible differences in charging currents. In addition, USB ports on desktop computers/laptops are also inadequate for charging and should not be used.

## 2 Starting up the TDX20 Power and Reboot Procedures



Power Button

- Pressing the power button while the TDX20 is OFF powers up and re-boots the unit.
- While charging, the TDX20 display will go dark after a time set in the 'Display Properties' settings in Windows® Control Panel. Touching the screen or any key will awaken it from this idle state.
- If left idle for 30 minutes, the TDX20 will automatically power down.
- Pressing the power button briefly, while the unit is on, will either put the TDX20 into suspend mode, or wake it up depending on its current state.
- Pressing and holding the power button for more than 3 seconds causes the TDX20 to power off.

### Download DC Console

### DC Suite Software

### DC Suite Software

### DC Uplink

## 3 Download DC Console




Utilize **DC Console** to quickly modify existing applications or create new ones and transfer files from your TDX20 to your PC.

Download the DC Console utility at  
[www.amltd.com/Software/DC-Software](http://www.amltd.com/Software/DC-Software)



The TDX20 comes with a suite of pre-installed applications as a part of our **DC Suite**. These applications were developed for common data collection tasks and are ready to go right out of the box.

**Dashboard**  
All applications are launched from here.



### Item Count

Simple one-field scanning.

### Item Quantity

Scan the Item Number and key in the Quantity.

### Item Serial

Scan in Item Number and the unique Serial Number.

### Item Lot Quantity

Scan the Item Number and then collect Lot Number and Quantity information.

### Asset Tracker

Asset Tracking application.

### Check In/Out

Check-In/Out application for tool or part rooms.

### Compare

Compare two scans and confirm that they are the same OR not the same.



### Other Apps:



The DC Uplink app provides a wireless way to send data files and update relevant lookup files, on the device, using a local network with a wireless

access point. The user interface will display any data files created by other DC Suite apps.

The interface will also display lookup files that are configured to update (using DC Console). These files can be selected and synced, provided that DC Console or DC Sync server is running. This also requires that DC Suite and DC Console (or DC Sync) end points are configured correctly (IP Address and Port).

DC Uplink requires a license that is typically purchased at the same time as the TDX20.



## DC Console

DC Console is an easy-to-use application-design software that allows users to modify existing applications or create their own applications.

Features include lookup-file support, friendly user interface and the ability to tag output files with device-specific information.



## Using the Summit Client Utility

- 1 Open the Summit Client Utility
- 2 Enter Admin password: **SUMMIT**




## Using the Summit Client Utility

- 3 From Profile Tab: Create New Profile
- 4 Configure WLAN settings: Commit
- 5 From Main Tab: Change Active Profile



## WPAN

- 1 Open the LCM (Laird Connection Manager)
- 2 Go to **Configuration** Tab
- 3 Click **Scan** to find and select a device
- 4 Enter Admin password: **SUMMIT**

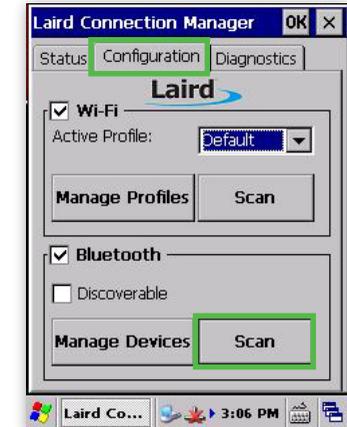

## Accessories

### Protective Cases



**CAS-LDX10**  
Holster, LDX10/TDX20



**CAS-LDX10-N**  
Canvas Case w/Lanyard



**CAS-7300**  
Protective Case

- CAS-7300-GRN**  
Green (Standard)
- CAS-7300-RED**  
Red
- CAS-7300-ORG**  
Orange
- CAS-7300-YEL**  
Yellow
- CAS-7300-BLU**  
Blue
- CAS-7300-BLK**  
Black

## Accessories

## Support

Learn More About the TDX20 at:  
[www.amltd.com/tdx20](http://www.amltd.com/tdx20)

For **DC Suite** downloads and support visit:  
[www.amltd.com/Software/DC-Software](http://www.amltd.com/Software/DC-Software)

### Warranty Agreements

- SVC-EWTDX20** Extended Warranty, 3 year, TDX20
- SVC-EWPTDX20** Extended Warranty PLUS, 3 year, TDX20

### Get Updates from AML

Don't forget to register your product(s) online at [www.amltd.com/register](http://www.amltd.com/register) to receive updates about AML products and software.

© 2016 American Microsystems, Ltd. All rights reserved.

American Microsystems, Ltd. reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult American Microsystems, Ltd. to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of American Microsystems, Ltd. American Microsystems, Ltd. shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material. This document contains proprietary information which is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of American Microsystems, Ltd.



2190 Regal Parkway  
Euless, TX 76040  
800.648.4452  
[www.amltd.com](http://www.amltd.com)